

RAZU-2



RAZU-2


Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Operating Temperature	T_A	-40 to +125	$^{\circ}\text{C}$
Storage Temperature	T_{stg}	-65 to +150	$^{\circ}\text{C}$
Supply Voltage	V_s	8	V
Output Sinking Current	I_o	10	mA
Measured Current	I_m	Limited by conductor	A

Characteristics ($T_A = 25^{\circ}\text{C}$ unless stated, $V_s = 5\text{V}$)

Parameter	Symbol	Lower Limit	Typical	Upper Limit	Unit
Supply Current (no load)	I_s			11 ¹	mA
Supply Voltage	V_s	4.5	5.0	6.0	V
Current range for $\pm 1\%$ error (-25 to +90 $^{\circ}\text{C}$)	I_m	+/-60			A
Power-on settling time to 99%	t_{po}			15	μs
Null Output Voltage	V_o	2.4	2.5	2.6	V
Transfer Function (per turn, -25 $^{\circ}\text{C}$ to +90 $^{\circ}\text{C}$)	$\Delta V/I$	13	17	22	mV/A
Non-linearity (+/-60A, -25 $^{\circ}\text{C}$ to +90 $^{\circ}\text{C}$)				1.0	%
Hysteresis (+/-60A)				0.5	%
Null drift due to temperature change	$TC_{\Delta V_o/V_o}$			+/-0.25	mV/K
Gain change due to temperature change	TC_G	-0.1	0.1	0.18	%/K
Rise time 0 to 20A	t_r			14	μs
Frequency response	$f_{-3\text{dB}}$		35		kHz
Output resistance	R_o		2	5	Ω

¹ For lower supply current requirements, fast stabilization allows pulsed supply current operation. Typically 50 μA achievable for AC operation.

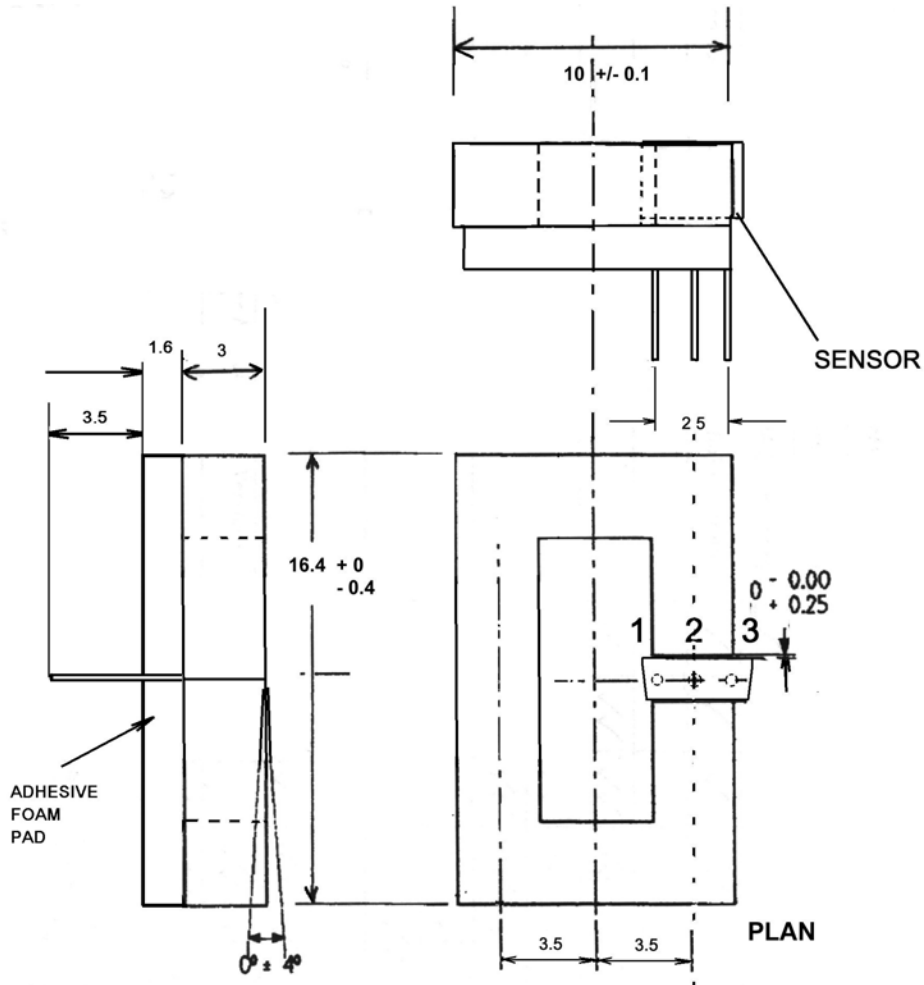

PIN CONFIGURATION

- 1 5V
- 2 0V
- 3 OUTPUT



ALL DIMENSIONS IN mm

	29/8/05 Lead length defined at 3.5mm 29/8/05 Foam pad defined	
PRODUCT: RAZU-2	SCALE: NTS	DRG #
RAZTEC (NZ) LTD	DATE: 17/3/05	0503
DRAWN: WP	CHECKED:	REVISION: 1.2

